arXiv:hep-th/9712108v2 11 Dec 1997

An easy way to solve two-loop vertex integrals

Alfredo T. Suzuki[1] and Alexandre G. M. Schmidt[2]

Instituto de Física Teórica, Universidade Estadual Paulista, R.Pamplona 145, São Paulo SP, CEP 01405-900, Brazil.

Abstract

Negative dimensional integration is a step further dimensional regularization ideas. In this approach, based on the principle of analytic continuation, Feynman integrals are polynomial ones and for this reason very simple to handle, contrary to the usual parametric ones. The result of the integral worked out in $D < 0$ must be analytically continued again — of course — to real physical world, $D > 0$, and this step presents no difficulties. We consider four two-loop three-point vertex diagrams with arbitrary exponents of propagators and dimension, and two legs on-shell. As far as we know there is no similar calculation in the literature, and our original results are neatly expressed in terms of products of gamma functions.

PACS: 02.90+p, 03.70+k, 12.38.Bx

Running Title: An easy way to solve two-loop vertex integrals

[1]E-mail:suzuki@ift.unesp.br
[2]E-mail:schmidt@ift.unesp.br

I. Introduction.

The comprehension and achievements of Quantum Field Theory are mostly due to the perturbative approach, where the calculation of Feynman diagrams is an inevitable task. There are several techniques to solve the associated integrals, wherein the simpler the method to solve them the better. We can just mention a few ones: the Mellin-Barnes' representation of massive propagators[1], the Gegenbauer polynomial approach in configuration space[2] and some others[3].

But none of them use the principle of analytic continuation in such an interesting and beautiful way as the technique[4, 5] known as Negative Dimensional Integration Method(NDIM). Moreover, NDIM gives *simultaneously* several results and shares all the concepts of dimensional regularization[6]. We do not know other approach which has this amazing property.

Our aim here is to present original results for four scalar integrals pertaining to three-point vertex diagrams at two-loop level where two of the external legs are set on-shell. They are original in the sense that all the exponents of propagators and the space-time dimension are left arbitrary, and as far as we know there is no similar calculation in the literature.

The outline for our paper is as follows: in section 2 we perform the

Feynman integrals in the negative dimension integration approach, i.e., solve them in $D < 0$, and then analytically continue the result to real physical world, $D > 0$. In section 3, we consider the special cases of interest and then in section 4 we present our conclusion.

II. Feynman Graphs with Five and Four Massless Propagators.

To calculate the scalar integral that contributes to the Feynman diagram of figure 1, we will follow the procedure of [7]. Let the gaussian integral be:

$$\begin{aligned} G_1(p^2;D) &= \int d^Dr\; d^Dq \exp\left[-\alpha q^2 - \beta r^2 - \gamma(p-r-q)^2 - \omega(q+k)^2 \right. \\ &\quad \left. -\theta(q+k+r)^2\right], \end{aligned} \tag{1}$$

which, after some simple algebra we get as a result,

$$G_1(p^2;D) = \left(\frac{\pi^2}{\mu}\right)^{D/2} \exp\left(-\frac{1}{\mu}\alpha\beta\gamma p^2\right), \tag{2}$$

where $\mu = \alpha\beta + \alpha\gamma + \alpha\theta + \beta\gamma + \beta\theta + \beta\omega + \theta\omega + \gamma\omega$. As in reference [7], we expand (2) in Taylor series,

$$\begin{aligned} G_1(p^2;D) &= \pi^D \sum_{\{n_j\}=0}^{\infty} \frac{(-p^2)^{n_1}(-n_1 - \frac{1}{2}D)!}{n_1!n_2!n_3!n_4!n_5!n_6!n_7!n_8!n_9!} \alpha^{n_1+n_2+n_3+n_4} \\ &\quad \times \beta^{n_1+n_2+n_5+n_6+n_7} \gamma^{n_1+n_3+n_5+n_9} \theta^{n_4+n_6+n_8} \omega^{n_7+n_8+n_9}, \end{aligned} \tag{3}$$

where we used a multinomial expansion for μ and for this reason, the constraint

$$-n_1 - \frac{1}{2}D = n_2 + n_3 + n_4 + n_5 + n_6 + n_7 + n_8 + n_9,$$

must be satisfied. Observe that the indices $\{n_j\}$ take only positive values, so, D is negative. Consider now the expansion — before integration — in Taylor series of the same gaussian integral, eq.(1),

$$G_1(p^2; D) = \sum_{i,j,l,m,n=0}^{\infty} \frac{(-1)^{i+j+l+m+n}}{i!j!l!m!n!} \alpha^i \beta^j \gamma^l \omega^m \theta^n \mathcal{A}(i,j,l,m,n; D), \qquad (4)$$

where

$$\mathcal{A}(i,j,l,m,n; D) \equiv \int d^D r \; d^D q \; (q^2)^i (r^2)^j (p-r-q)^{2l} (q+k)^{2m} (q+k+r)^{2n}, \; (5)$$

is the negative dimensional integral. Note that its integrand is formed by the squares of the internal momenta flowing in the diagram raised to arbitrary positive integral powers. Were these powers negative, one would have the usual Feynman integral for the diagram with propagators in the denominator. Comparing (3) and (4) we can solve for the negative dimensional Feynman integral, $\mathcal{A}$,

$$\mathcal{A}(i,j,l,m,n; D) \;\; = \;\; \frac{(-\pi)^D (p^2)^\sigma g}{\Gamma(1+\sigma)} \sum_{\{n_j\}=0}^{\infty} \frac{\delta_{n_1+n_2+n_3+n_4,i} \delta_{n_1+n_2+n_5+n_6+n_7,j}}{n_2! n_3! n_4! n_5! n_6! n_7! n_8! n_9!}$$

$$\times\delta_{n_1+n_3+n_5+n_9,l}\delta_{n_4+n_6+n_8,m}\delta_{n_7+n_8+n_9,n}, \tag{6}$$

where $\sigma = i+j+l+m+n+D$ and

$$g = \Gamma(1+i)\Gamma(1+j)\Gamma(1+l)\Gamma(1+m)\Gamma(1+n)\Gamma(1-\sigma-\frac{1}{2}D).$$

We conclude that in solving a system of linear algebraic equations we have the result for the Feynman integral in negative dimensions, which analytically continued to positive D in a convenient way will reproduce the standard Feynman integral. The system to be satisfied has five equations and eight indices (the "unknowns"),

$$\left\{\begin{array}{rcl} n_2+n_3+n_4 &=& i-\sigma \\ n_2+n_5+n_6+n_7 &=& j-\sigma \\ n_3+n_5+n_9 &=& l-\sigma \\ n_4+n_6+n_8 &=& m \\ n_7+n_8+n_9 &=& n \end{array}\right. , \tag{7}$$

because one of them reads $n_1 = \sigma$. This means that to solve the system we have to leave three indices free, or said equivalently, we have to solve $C_3^8 = 56$ different systems. Of these, twenty turns out to be unsolvable systems, or systems where the set solution is empty. Therefore, it remains thirty-six with non-trivial sets of solutions. However, since these thirty-six must give the same end result after the summation is performed, i.e., a thirty-six-fold degeneracy, we need to solve only one of them.

One such solution is,

$$\left\{\begin{array}{lcl} n_1 &=& \sigma, \\ n_2 &=& -l-m-\frac{1}{2}D-n_7, \\ n_3 &=& -j-m-n-\frac{1}{2}D+n_6+n_7+n_8, \\ n_4 &=& m-n_6-n_7-n_8, \\ n_5 &=& -i-n-\frac{1}{2}D-n_6, \\ n_9 &=& n-n_7-n_8. \end{array}\right. \tag{8}$$

Following the same ideas of [7] we can sum the three series (it is easier to sum first in n_8 because the other two, n_6, and n_7 decouple) and we get,

$$\begin{aligned} \mathcal{A}(i,j,l,m,n;D) &= \frac{(-\pi)^D (p^2)^\sigma \Gamma(1+i)\Gamma(1+j)\Gamma(1+l)}{\Gamma(1+\sigma)\Gamma(1+i-\sigma)\Gamma(1+l-\sigma)\Gamma(1-j-\frac{1}{2}D)} \\ &\times \frac{\Gamma(1-\sigma-\frac{1}{2}D)\Gamma(1-j-l-m-D)}{\Gamma(1-i-n-\frac{1}{2}D)\Gamma(1-l-m-\frac{1}{2}D)\Gamma(1+\sigma)} \\ &\times \Gamma(1-i-j-n-D), \end{aligned} \tag{9}$$

in negative D. Using the property of Pochhammer symbol,

$$(a|-k) = \frac{(-1)^k}{(1-a|k)}, \tag{10}$$

where

$$(a|l) \equiv (a)_l = \frac{\Gamma(a+l)}{\Gamma(a)},$$

we perform the analytic continuation, i.e., bring back the result to real world,

$$\mathcal{A}^{\mathbf{AC}}(i,j,l,m,n;D) = (-\pi)^D (p^2)^\sigma (-i|\sigma)(-l|\sigma)(\sigma+\frac{1}{2}D|-2\sigma-\frac{1}{2}D)$$

$$\times(-j|i+j+n+\frac{1}{2}D)(j+l+m+D|-l-m-\frac{1}{2}D)$$
$$\times(i+j+n+D|-i-j+l+m-n-\frac{1}{2}D). \qquad (11)$$

This is the result for the Feynman graph of figure 1 with two external legs on-shell and arbitrary exponents of propagators and dimension.

Consider now the graph of figure 2 and its gaussian integral,

$$\begin{aligned} G_2(p^2;D) &= \int d^Dr\; d^Dq \exp\left[-\alpha q^2-\beta(p-q)^2-\gamma(t+q)^2-\omega r^2\right. \\ &\quad \left.-\theta(t+q-r)^2\right], \end{aligned} \qquad (12)$$

carrying out the momentum integration,

$$G_2(p^2;D)=\left(\frac{\pi^2}{\phi}\right)^{D/2}\exp\left[\frac{-\alpha\beta}{\phi}(\theta+\omega)p^2\right], \qquad (13)$$

where $\phi=\alpha\omega+\beta\omega+\gamma\omega+\theta\omega+\alpha\theta+\beta\theta+\gamma\theta$. Now, expanding it and (12) in Taylor series, ϕ in a multinomial one and comparing both,

$$\begin{aligned} \mathcal{B}(i,j,l,m,n;D) &\equiv \int d^Dr\; d^Dq\; (r^2)^i(p-q)^{2j}(t+q)^{2l}(r^2)^m(t+q-r)^{2n} \\ &= (-\pi)^D(p^2)^\sigma g\sum_{\{n_j\}=0}^{\infty}\frac{1}{n_1!n_2!n_3!n_4!n_5!n_6!n_7!n_8!n_9!}, \end{aligned} \qquad (14)$$

where g and σ are the same as previously defined. The system to be satisfied now has 6 equations and 9 indices, i.e., there are in fact 84 systems of linear

algebraic equations (6×6), and note that we expect the result to be symmetric (see the diagram) between $m \leftrightarrow n$,

$$\left\{\begin{array}{rcl} n_1+n_2+n_3+n_7 &=& i \\ n_1+n_2+n_4+n_8 &=& j \\ n_5+n_9 &=& l \\ n_2+n_3+n_4+n_5+n_6 &=& m \\ n_1+n_6+n_7+n_8+n_9 &=& n \\ n_1+n_2 &=& \sigma \end{array}\right. . \tag{15}$$

Again, three indices will remain free, that is, the result provided by NDIM will be written as a triple series. Among the 84 possible solutions 52 are trivial ones, so, it remains to solve thirty-two 6×6 systems. The result, as in [7], is degenerate, but now a thirty-two-fold degeneracy. Solving only one will do, and one such solution is:

$$\left\{\begin{array}{rcl} n_1 &=& -m-\frac{1}{2}D-n_7-n_8-n_9, \\ n_2 &=& m+\sigma+\frac{1}{2}D+n_7+n_8+n_9, \\ n_3 &=& i-\sigma-n_7, \\ n_4 &=& j-\sigma-n_8, \\ n_5 &=& l-n_9, \\ n_6 &=& m+n+\frac{1}{2}D. \end{array}\right. \tag{16}$$

Inserting these values in the result (14) one verifies that the series can be written in terms of ${}_2F_1$ hypergeometric functions of unity argument and for this reason can be summed[8], yielding

$$\mathcal{B}(i,j,l,m,n;D) = \frac{(-\pi)^D (p^2)^\sigma \Gamma(1+i)\Gamma(1+j)\Gamma(1+m)}{\Gamma(1+n)\Gamma(1-m-\frac{1}{2}D)\Gamma(1-n-\frac{1}{2}D)\Gamma(1+i-\sigma)}$$

$$\times \quad \frac{\Gamma(1-\sigma-\frac{1}{2}D)\Gamma(1-m-n-D)}{\Gamma(1+j-\sigma)\Gamma(1+m+n+\frac{1}{2}D)\Gamma(1+\sigma)}, \tag{17}$$

which, after the convenient analytic continuation to real physical world of positive D, gives

$$\begin{aligned}
\mathcal{B}^{\mathbf{AC}}(i,j,l,m,n;D) &= \pi^D (p^2)^\sigma (-m|m+n+\frac{1}{2}D)(-n|m+n+\frac{1}{2}D)(-i|\sigma) \\
&\times \quad (-j|\sigma)(m+n+D|-2m-2n-\frac{3}{2}D) \\
&\times \quad (\sigma+\frac{1}{2}D|-2\sigma-\frac{1}{2}D).
\end{aligned} \tag{18}$$

This result is valid for arbitrary exponents of propagators and space-time dimension, in Euclidean space.

For the next graph, figure 3, we begin with another gaussian integral,

$$\begin{aligned}
G_3(p^2;D) &= \int d^D r \; d^D q \exp\left[-\alpha q^2 - \beta r^2 - \gamma(p-q)^2 - \omega(p-r)^2 \right. \\
&\left. -\theta(k+r)^2\right].
\end{aligned} \tag{19}$$

This integral is the simplest one of this work; we get as a result,

$$G_3(p^2;D) = \left(\frac{\pi^2}{\lambda_1\lambda_2}\right)^{D/2} \exp\left(-\frac{\alpha\gamma}{\lambda_1}p^2\right) \exp\left(-\frac{\beta\omega}{\lambda_2}p^2\right), \tag{20}$$

where $\lambda_1 = \alpha+\gamma$ and $\lambda_2 = \beta+\theta+\omega$. After carrying out the usual procedure we obtain a system of 7 equations with 7 indices, i.e., there is only one

solution that after the analytic continuation is,

$$\begin{aligned}
\mathcal{C}^{\mathbf{AC}}(i,j,l,m,n;D) &\equiv \int d^Dr\; d^Dq\; (q^2)^i (r^2)^j (p-q)^{2l} (p-r)^{2m} (k+r)^{2n} \\
&= \pi^D (p^2)^\sigma (i+l+D|-i-l+m+n-\frac{1}{2}D) \\
&\times\; (-i|-l-\frac{1}{2}D)(-l|i+l+\frac{1}{2}D)(-j|-m-n-\frac{1}{2}D) \\
&\times\; (-m|l+m+\frac{1}{2}D)(j+m+n+D|-m-\frac{1}{2}D), \qquad (21)
\end{aligned}$$

where σ is the same as previously defined.

The last scalar integral contributes to a graph, see figure 4, that shows the so-called overlapping divergences[9] and observe that it has four propagators. We proceed as above and write down only the final result,

$$\mathcal{D}(i,j,l,m;D) = \int d^Dq\; d^Dr\; (q^2)^i \left[(q-p)^2\right]^j (r^2)^l \left[(r-q-k)^2\right]^m, \qquad (22)$$

and the general result

$$\begin{aligned}
\mathcal{D}^{\mathbf{AC}}(i,j,l,m;D) &= \pi^D (p^2)^{\sigma'} (-i|\sigma')(-j|\sigma')(-l|-m-\frac{1}{2}D) \\
&\quad \times (-m|\sigma'-i-j-\frac{1}{2}D)(\sigma'+\frac{1}{2}D|-2\sigma'-\frac{1}{2}D) \\
&\quad \times (D+l+m|-l-\frac{1}{2}D), \qquad (23)
\end{aligned}$$

where $\sigma' = i+j+l+m+D = \sigma - n$.

III. Special Cases.

The special cases that we deal in this section are related to the Feynman integrals with unity exponents for the propagators. They correspond exactly to the cases for which $i = j = l = m = n = -1$. For convenience we use a shorthand notation ($\{-1\}$) to represent ($i = -1$, $j = -1$, $l = -1$, $m = -1$, $n = -1$).

The first scalar Feynman integral we carried out, eq.(5), yields then

$$\mathcal{A}^{\mathbf{AC}}(\{-1\}) = \pi^D (p^2)^{D-5} \frac{\Gamma^2(D-4)\Gamma(5-D)\Gamma^2(\frac{1}{2}D-2)\Gamma(\frac{1}{2}D-1)}{\Gamma^2(D-3)\Gamma(\frac{3}{2}D-5)}. \quad (24)$$

For the second one the result in the same particular case, reads

$$\mathcal{B}^{\mathbf{AC}}(\{-1\}) = \pi^D (p^2)^{D-5} \frac{\Gamma^2(\frac{1}{2}D-1)\Gamma(5-D)\Gamma^2(D-4)\Gamma(2-\frac{1}{2}D)}{\Gamma(D-2)\Gamma(\frac{3}{2}D-5)}. \quad (25)$$

For the third,

$$\mathcal{C}^{\mathbf{AC}}(\{-1\}) = \pi^D (p^2)^{D-5} \frac{\Gamma^2(\frac{1}{2}D-2)\Gamma(2-\frac{1}{2}D)\Gamma^2(\frac{1}{2}D-1)\Gamma(3-\frac{1}{2}D)}{\Gamma(D-3)\Gamma(D-2)}, \quad (26)$$

and for the last one,

$$\mathcal{D}^{\mathbf{AC}}(\{-1\}) = \frac{\pi^D (p^2)^{D-4}\Gamma^2(D-3)\Gamma^2(\frac{1}{2}D-1)\Gamma(2-\frac{1}{2}D)\Gamma(4-D)}{\Gamma(D-2)\Gamma(\frac{3}{2}D-4)}. \quad (27)$$

These are the results in Euclidean space.

IV. Conclusion.

NDIM's amazing feature of transfering the task of solving parametric integrals to solving systems of linear algebraic equations allows us to greatly simplify the effort to solve loop integrals. With two-loop vertex diagrams as examples we worked out rather cumbersome integrals with ease. The analytic continuation of space-time dimension to *negative* values has shown advantages: we interpret the analytic continuation like in dimensional regularization but solve the Feynman integrals in a much simpler way because they are polynomial ones. In this approach there are no cumbersome parametric integrals. We presented original results for four two-loop three-point scalar integrals, (see fig.1-4) for arbitrary D and exponents of the propagators, (11), (18), (21), (23).

Acknowledgments

AGMS gratefully acknowledges CNPq (Conselho Nacional de Desenvolvimento Científico e Tecnológico, Brazil) for the financial support.

References

[1] E.E.Boos, A.I.Davydychev, Theor.Math.Phys.**89**(1991)1052; A.Davydychev, J.Math.Phys. **32**,4 (1991) 1052; J.Math.Phys.**33**,1(1991)358.

[2] K.G.Chretkin, A.L.Kataev, F.V.Tkachov, Nucl.Phys.**B174** (1980) 345.

[3] J.Fleischer, V.A.Smirnov, O.V.Tarasov, Z.Phys.**C74** (1997)379; A.Frink, U.Kilian, D.Kreimer, Nucl.Phys.**B 488** (1997)426; A.I.Davydycehv, *International Symposium on Radiative Corrections CRAD96* (Cracow, 1996); hep-ph/9710510.

[4] I.G.Halliday, R.M.Ricotta, Phys.Lett.**B193**, 2(1987)241; R.M.Ricotta, *Topics in Field Theory*, (Ph.D. Thesis, Imperial College, 1987); G.V.Dunne, I.G.Halliday, Phys.Lett. **B193**,2(1987)247.

[5] A.T.Suzuki, R.M.Ricotta, *Topics on Theoretical Physics - Festschrift for P.L.Ferreira*, (1995)219, V.C.Aguilera-Navarro *et al* (Ed.); A.T.Suzuki, R.M.Ricotta, *XVI Brazilian Meeting on Particles and Fields*, (1995) 386, C.O. Escobar (Ed.); I.G.Halliday, R.M.Ricotta, A.T.Suzuki, *XVII*

Brazilian Meeting on Particles and Fields, (1996)495, A.J.da Silva *et al* (Ed.).

[6] G.'t Hooft, M.Veltman, Nucl.Phys.**B44** (1972)189; C.G. Bollini, J.J. Giambiagi, Nuovo Cim. **B12** (1972)20.

[7] A.T.Suzuki, A.G.M.Schmidt, JHEP **09** (1997)002. JHEP (Journal of High Energy Physics) is an electronic journal. See for example some of its WEB mirrors: http://jhep.cern.ch, http://jhep.sissa.it .

[8] N.N.Lebedev, *Special Functions and Applications* (Prentice-Hall, 1965). Y.L.Luke, *Special Functions and Their Approximations* (Vol.I, Academic Press, 1969). E.D.Rainville, *Special Functions* (Chelsea Pub. Co., 1960). P.M.Morse, H.Feshbach, *Methods of Theorethical Physics* (McGraw-Hill, 1953). I.S.Gradstein, I.M.Rhizik, *Table of Integrals, Series and Products* (Academic Press, 1994).

[9] D.B.Fairlie,

P.V.Landshoff, J.Nutall, J.C.Polkinghorne, J.Math.Phys.**3**,4 (1962)594; R.Eden, P.V.Landshoff, D.I.Olive, J.C.Polkinghorne, *The Analytic S-Matrix* (Cambridge Univ.Press, 1966).

FIGURE CAPTIONS

Figure 1: Two-loop three point vertex calculated with NDIM. We consider that the two lower external legs are on-shell, i.e., $k^2 = t^2 = 0$.

Figure 2: Another two loop three point graph calculated in the NDIM approach.

Figure 3: The easiest two loop three point vertex diagram calculated in the NDIM approach.

Figure 4: Two-loop three-point vertex that has overlapping divergences.

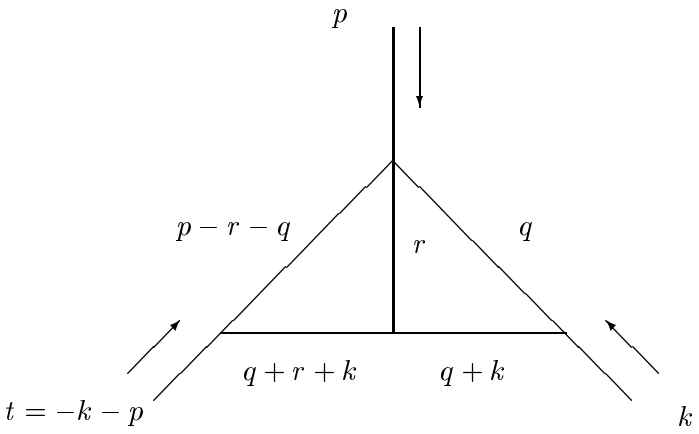
p
$p-r-q$
r
q
$q+r+k$
$q+k$
$t=-k-p$
k

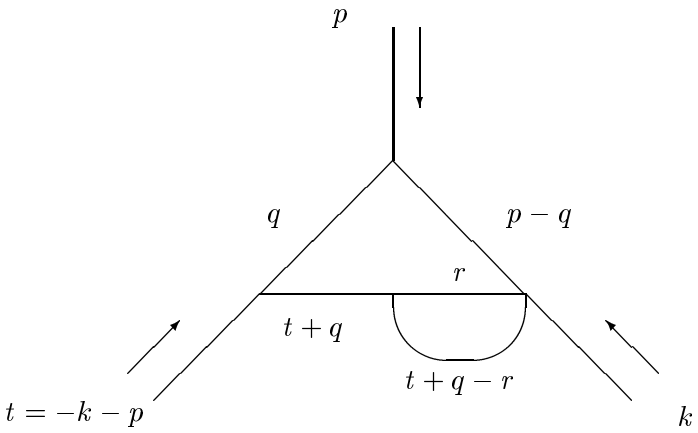
p
q
$p-q$
r
$t+q$
$t+q-r$
$t=-k-p$
k

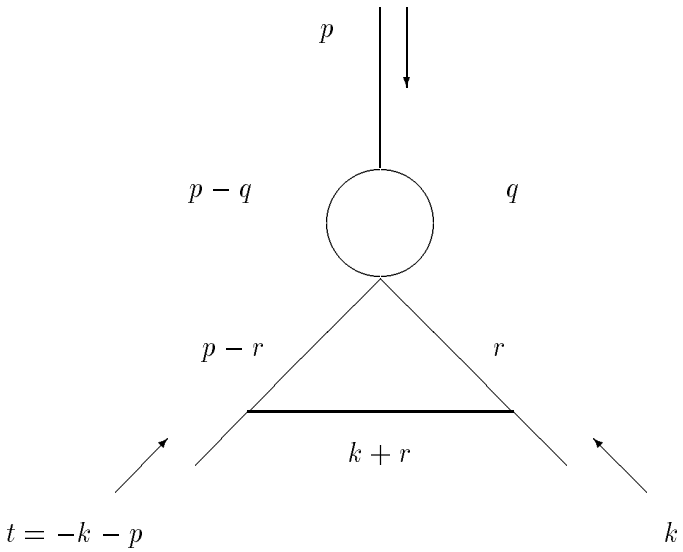
p
$p-q$
q
$p-r$
r
$k+r$
$t=-k-p$
k

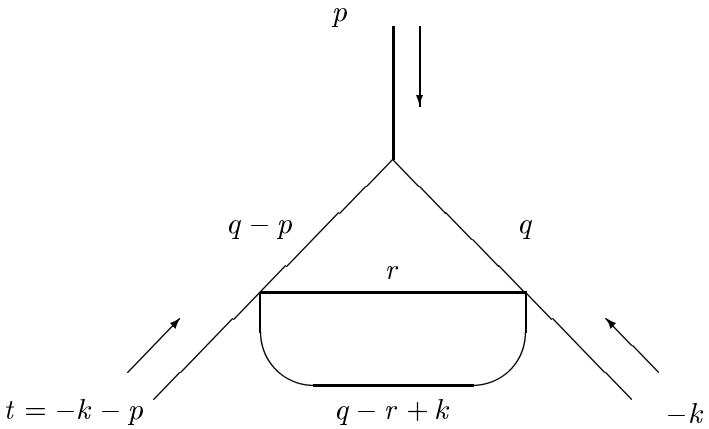
p
$q-p$
q
r
$t=-k-p$
$q-r+k$
$-k$